


# Super-G™ XL with tungsten

## SECONDARY CONVEYOR BELT CLEANING SYSTEM




The tungsten Super-G XL is a longer version of the Super-G with tungsten, available in lengths of 72", 84", and 96". The Super-G XL is built on a .25" thick, 3.5" x 3.5" box steel mainframe, similar to the Super Eraser™. Pins in the center allow it to hold two of our tungsten-tipped blades. The urethane cartridge holds the 6" tungsten-tipped blades, which allows the blades to flex with and maintain contact and pressure against the belt.

The Super-G's unique "pass-through mainframe design allows material to freely fall through it, keeping your systems online with little to no maintenance.

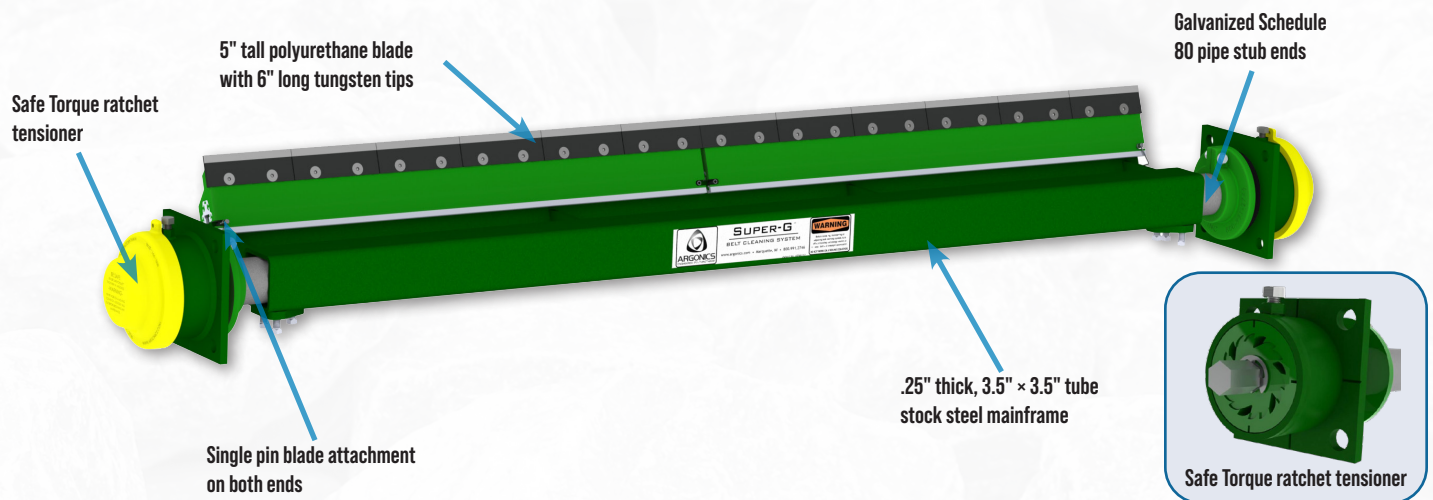

### BENEFITS:


- Effective performance for wet, sticky secondary cleaning applications
- Solid urethane cleaning blades also available
- The Perma-Torque internal central tensioner is adjustable from 20 to 80 ft-lb (27 to 108 Nm) resulting in uniform cleaning pressure to the conveyor belt
- Compact mounting footprint only protrudes 5" (127 mm) from mounting structure
- Brightly colored safety yellow end caps seal the Safe Torque™ ratchet from dust and water contamination
- Single pin blade attachment means quick blade change out, less downtime, and no rusty bolts

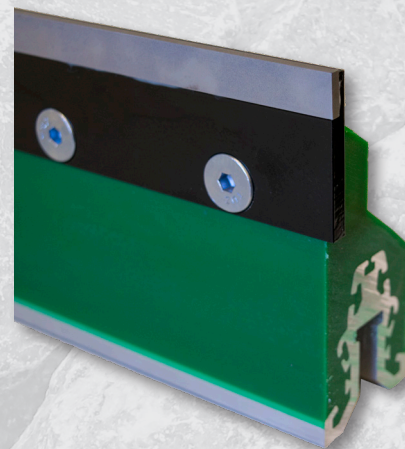



## SIZING INFORMATION

Dimensions - in. (mm)

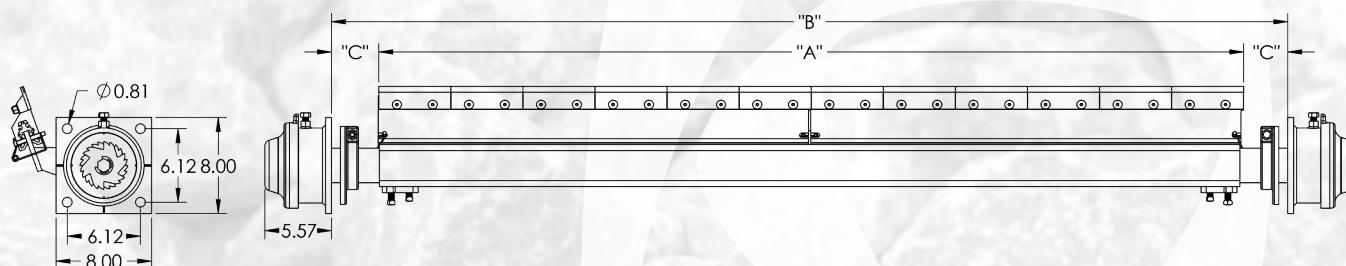

Part Number	A		Min B		Max B		Min C		Max C	
	inches	(mm)	inches	(mm)	inches	(mm)	inches	(mm)	inches	(mm)
CP-SGXL-72D-G83T	72.00	(1829)	72.50	(1841)	96.00	(2438)	0.25	(6)	12.00	(305)
CP-SGXL-84D-G83T	84.00	(2134)	84.50	(2146)	108.00	(2743)	0.25	(6)	12.00	(305)
CP-SGXL-96D-G83T	96.00	(2438)	96.50	(2451)	120.00	(3048)	0.25	(6)	12.00	(305)

## SPECIFICATIONS

Recommended Belt Speeds

Urethane: 0 - 750 fpm (3.8 m/s)


Tungsten: 0 - 900 fpm (4.5 m/s)

Mounting Distance

Vertical: 8" +/- .25" (203 mm +/- 6 mm)

Horizontal: up to 16" (406 mm)


## NOMENCLATURE

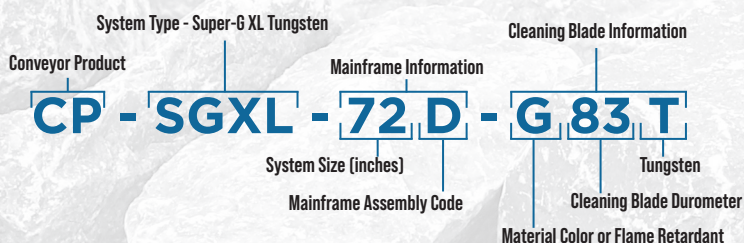

Note:

- System sizing of 6" (152 mm) under belt width is standard.

## MOUNTING INFORMATION

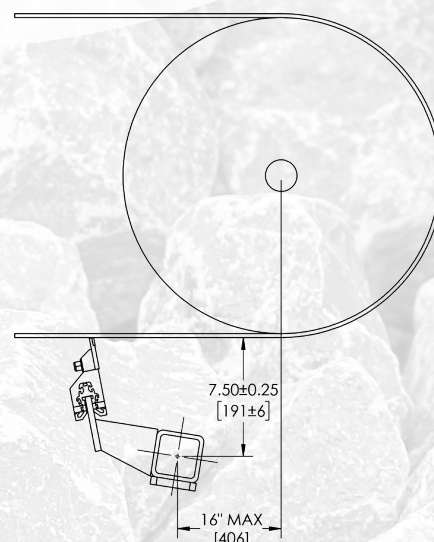

**ARGONICS**  
ENGINEERED POLYURETHANE

520 9th Street • Gwinn, MI 49841

906.226.9747 f: 906.226.9779

[www.argonics.com](http://www.argonics.com)



The Argonics Nested Triangle logo, Super-G™, and Safe Torque™ are trademarks of Argonics, Inc.

Patents: 6,056,112; 7,441,647; 5,979,638 LIB-CP-SGXL-04-01 3/20