


XTC™ with tungsten

SECONDARY CONVEYOR BELT CLEANING SYSTEM



The XTC with a tungsten carbide blade is one powerful reversing conveyor cleaner. The system can handle wet, dry, sticky or slimy conditions. The unique Web Torque™ tensioner has enough give for mechanical splices and the flow-over blade design reduces material build-up. The XTC is designed with the same toughness and durability as our standard Eraser, with a .25" (6 mm) thick, 3" x 3" (76 mm x 76 mm) tube stock steel mainframe and heavy duty stub ends.

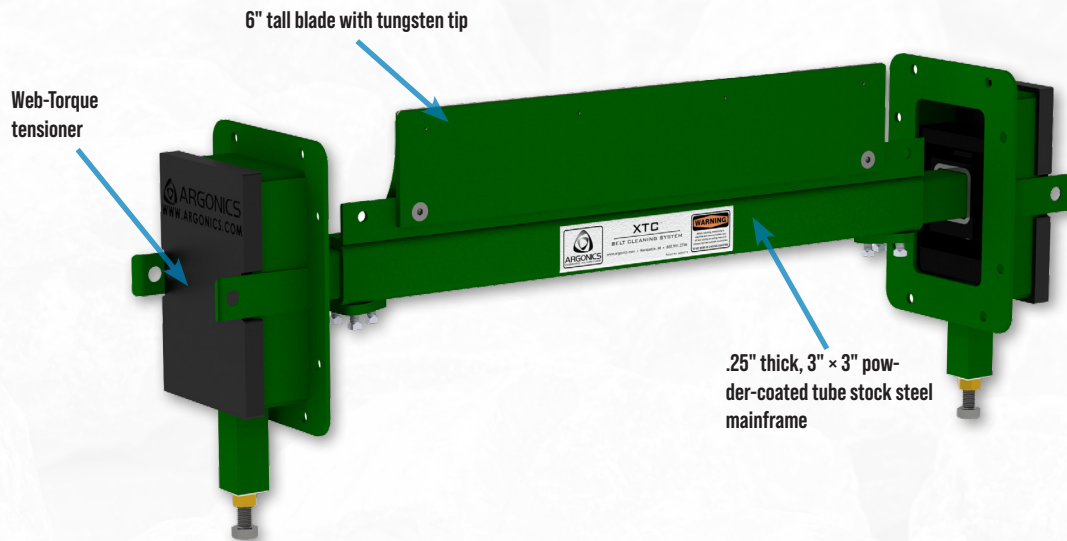

BENEFITS:


- Specifically designed for reversing conveyor belt applications
- Tungsten carbide blade is ideal for high-speed belts
- The Web-Torque shock absorbs the high level of impact and contortion which are present in most reversing applications
- No rusty springs, hoses, cables or shocks to deal with
- The tungsten carbide is mounted in the top of a powder-coated steel blade

BLADES:

Tungsten/Steel Tip
Good for wet, sticky, or caked-on materials, up to 400°F (203°C)

SIZING INFORMATION

Dimensions - in. (mm)

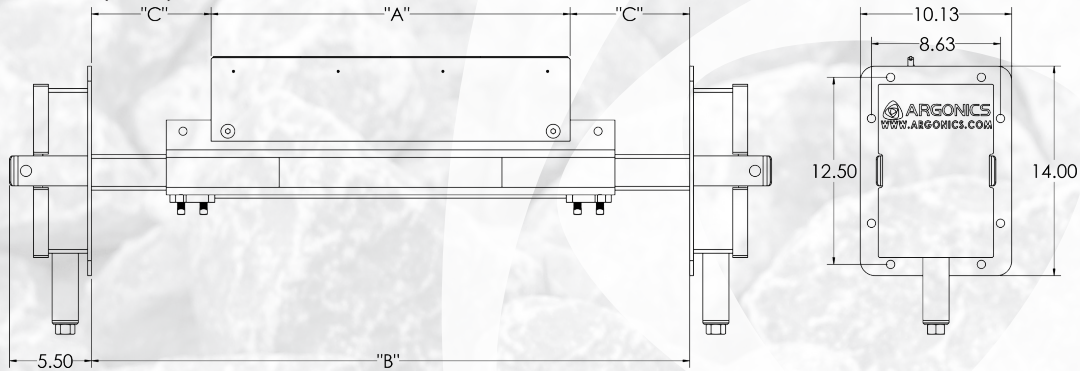

Part Number	A		Min B		Max B		Min C		Max C	
	inches	(mm)	inches	(mm)	inches	(mm)	inches	(mm)	inches	(mm)
CP-XTC-A24-30D-T	24.00	(610)	31.00	(787)	45.50	(1156)	3.50	(89)	10.75	(273)
CP-XTC-A30-36D-T	30.00	(762)	37.00	(940)	51.50	(1308)	3.50	(89)	10.75	(273)
CP-XTC-A36-42D-T	36.00	(914)	43.00	(1092)	57.50	(1461)	3.50	(89)	10.75	(273)
CP-XTC-A42-48D-T	42.00	(1067)	49.00	(1245)	63.50	(1613)	3.50	(89)	10.75	(273)
CP-XTC-A48-54D-T	48.00	(1219)	55.00	(1397)	69.50	(1765)	3.50	(89)	10.75	(273)
CP-XTC-A54-60D-T	54.00	(1372)	61.00	(1549)	75.50	(1918)	3.50	(89)	10.75	(273)

Notes:

- For extended stub ends add 6" (152 mm) to Max B and 12" (305 mm) to Max C.
- Standard sizes shown above. Other sizes are available from 18" (457 mm) to 96" (2438 mm).

SPECIFICATIONS

Recommended Belt Speeds


Tungsten: 0 - 1000 fpm (5.08 m/s)

Mounting Distance


Vertical: 14.62" +/- .25" (371 mm +/- 6 mm)

Horizontal: up to 16" (406 mm)

MOUNTING INFORMATION

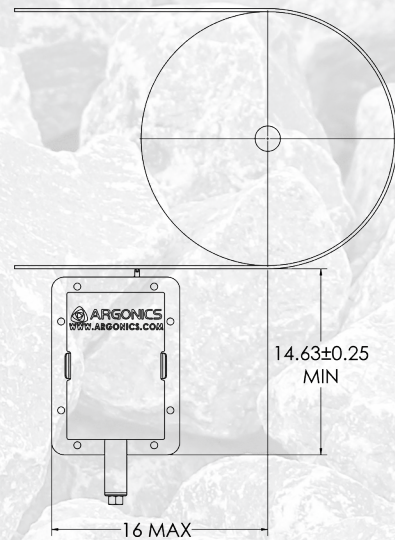

NOMENCLATURE

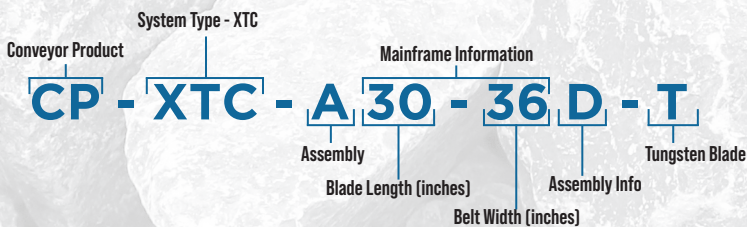

Note:

- Tungsten system does not follow this nomenclature. Please contact your Argonics rep. for more information.



ARGONICS
ENGINEERED POLYURETHANE

520 9th Street • Gwinn, MI 49841

906.226.9747 f: 906.226.9779

www.argonics.com



The Argonics Nested Triangle logo, XTC™, and Web-Torque™ are trademarks of Argonics, Inc.

Patents: 6,056,112; 7,441,647; 5,979,638 LIB-CP-XTC-T-04-01 5/20