# **Dual Durometer Ceramic Redi-Liner**

**ARGONICS** 

MODULAR LINING SYSTEM

The Dual Durometer Ceramic Redi-Liner bolt-in 12"x12" panels can be arranged into any wear pattern that is needed. Available in a 93/69 durometer combination, the panels fuse the abrasion-resistant qualities of ceramic and harder urethane with the impact absorption of the softer urethane in the back.



#### SIZES AVAILABLE:

- · Panels available in thicknesses of 2" and 21/2"
- 2" thick come with either 1/2" hextiles or 13/16" cylinders
- 21/2" thick available with 11/4" cylinders or 11/2" cubes

### PERFECT FOR THESE APPLICATIONS:

- Conveyor transfer points
  Screen feed liners
- Chutes with high wear
- Charge chutes
- Screen discharge liners

## WHY DUAL DUROMETER IS IMPORTANT:

- · The top, outer facing layer is ceramics embedded in a hard durometer, which is very abrasion-resistant
- · Bottom later, which faces the wall, is a softer, impact-absorbing durometer
- When a rock hits one of these panels, the back absorbs the impact while the front deflects it, eliminating bounce-back and ricochet
- The dual durometer ceramic panels exhibited 18% less rebound when compared to our single durometer ceramic panels




# **Dual Durometer Ceramic Redi-Liner**

## **MIX AND MATCH**

Combine our dual durometer ceramic liners with the other liners in the Redi-Liner family to create the ideal drop-zone for your needs. The dual durometer panels solve wear issues in your toughest hot spots. The single-bolt attachment method allows for quick change-out with limited downtime.

### REDUCED REBOUND

During testing, our dual durometer ceramic panels showed an 18% reduction in rebound over our single durometer ceramic panels.

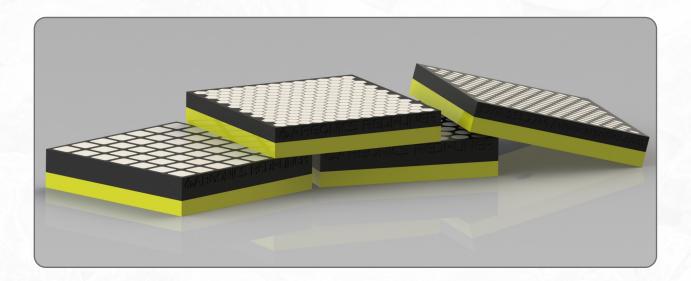

### Sizes Available:

12" x 12" x 2" with 1/2" hextiles or 13/16" cylinders 12" x 12" x 21/2" with 11/4" cylinders or 11/2" cubes



520 9th Street • Gwinn, MI 49841 906.226.9747 800.991.2746 f: 906.226.9779 www.argonics.com

