

Snap-Loc™ Skirting




FEATURES AND BENEFITS:

- 100% urethane construction
- Lasts 8-10 times longer than standard rubber skirt systems
- Coefficient of friction is 60% less than rubber, reducing drag on the belt and decreasing belt wear common with rubber skirt systems
- Snaps into standard unistrut channel that can be bolted or welded into place
- Engineered to create a perfect seal that follows the contours and low spots of the belt between trough rollers, maintaining contact with the belt throughout the life of the skirting

SNAP-LOC SIZES:

Seal Height	5", 6", 9", 14"
Length	50'
Cavity	With*, without

*Seal with cavity is intended for use on high-speed belts, 1,000+ fpm

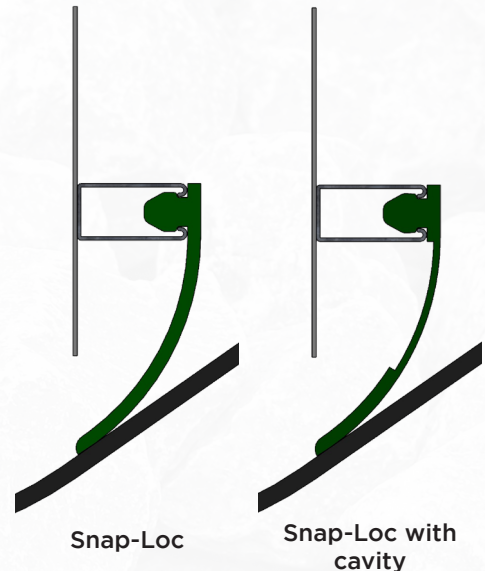

520 9th Street • Gwinn, MI 49841
906.226.9747 f: 906.226.9779
www.argonics.com

