

Flat and Beveled Skirting





FEATURES AND BENEFITS:

- 100% urethane construction
- Lasts 8-10 times longer than standard rubber skirt systems
- Coefficient of friction is 60% less than rubber, reducing drag on the belt and decreasing belt wear common with rubber skirt systems
- Fits into all manufacturers' existing skirt clamping systems on the market today
- Can be ordered with a flat edge or 35-degree beveled edge. The beveled edge provides an even greater advantage because it already matches the troughing angle of your belt, eliminating the "break-in" adjustment

SKIRTING SIZES:

| | |
|-------------|----------------------------------|
| Thickness | 1/4", 3/8", 1/2", 5/8", 3/4", 1" |
| Seal Height | 4", 5", 6", 8", 9", 10", 12" |
| Bevel | 0°, 35° |
| Length | 50', 50'+ (with surcharge) |

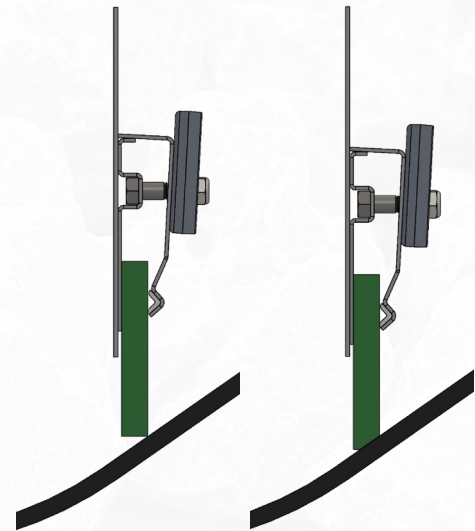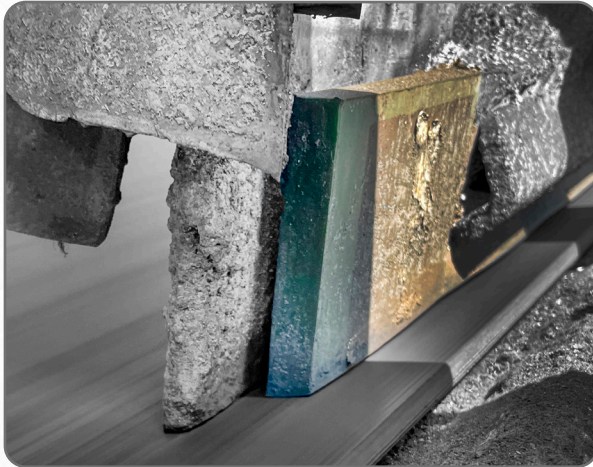

Flat Skirting

Beveled Skirting



ARGONICS
ENGINEERED POLYURETHANE

520 9th Street • Gwinn, MI 49841
906.226.9747 f: 906.226.9779
www.argonics.com

