


# RTS™

## SECONDARY CONVEYOR BELT CLEANING SYSTEM

**ARGONICS**  
ENGINEERED POLYURETHANE



The RTS polyurethane-free cleaner is perfect for difficult material or harsh environments. This system uses heavy-duty steel arms attached to a rugged tube stock mainframe. The 6" tungsten-tipped blades use ROSTA tensioners, which allow the blades to flex with and maintain contact and pressure against the belt.

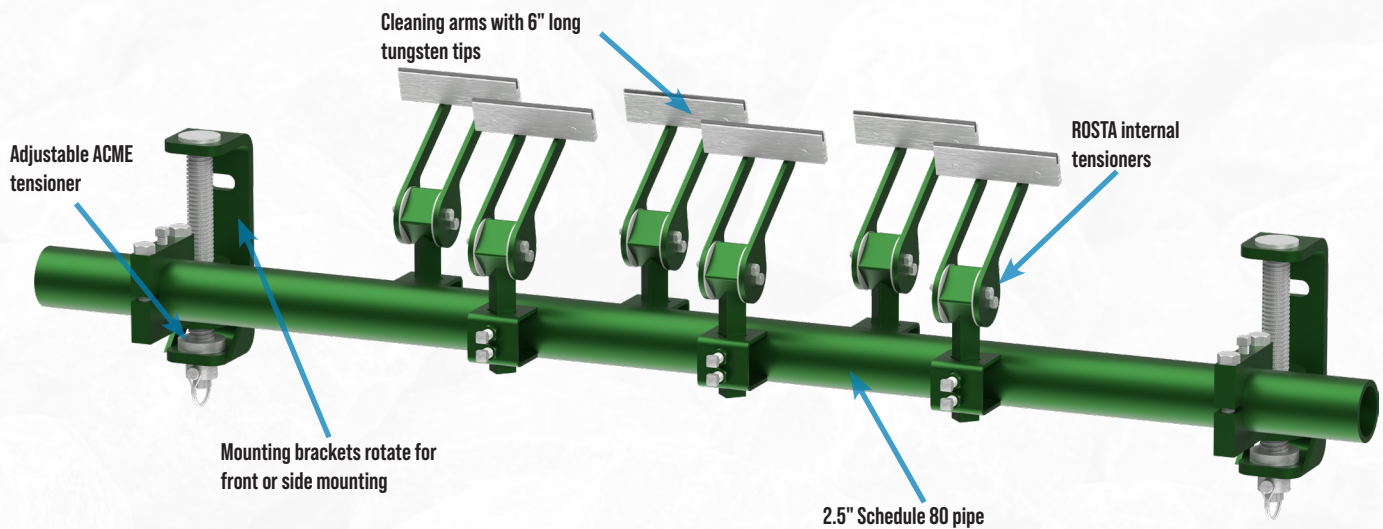

### BENEFITS:


- Requires little to no maintenance
- 6" tungsten blades provide effective cleaning for wet, sticky, or challenging material
- ROSTA tensioners in each arm provide consistent tension against the belt, yet allow them to flex to maintain contact
- Compact mounting footprint only protrudes X" (127 mm) from mounting structure
- Cleaning arm angle can be adjusted from 15° to 25°
- Our first polyurethane-free cleaner, ideal for use in harsh environments



**ARGONICS**  
ENGINEERED POLYURETHANE

# SIZING INFORMATION

Dimensions - in. (mm)

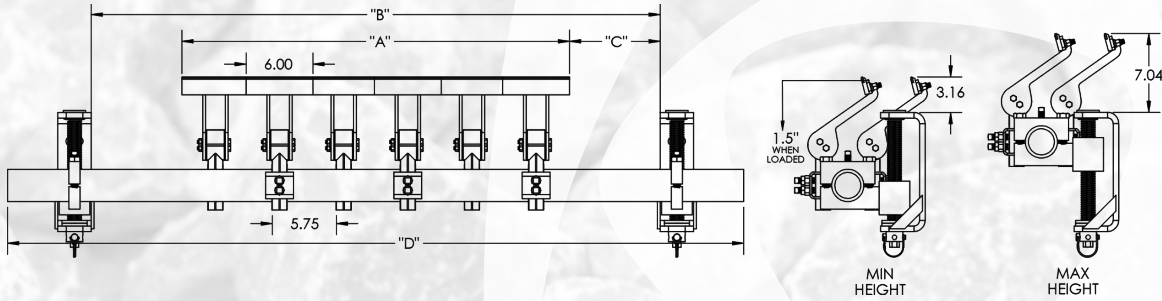


Part Number	A		Min B		Max B		Min C		Max C		D	
	inches	(mm)	inches	(mm)	inches	(mm)	inches	(mm)	inches	(mm)	inches	(mm)
CP-RTS-A24A-T	23.25	(591)	27.25	(692)	49.25	(1251)	2.00	(51)	13.00	(330)	54.00	(1372)
CP-RTS-A30A-T	29.00	(737)	33.00	(838)	55.00	(1397)	2.00	(51)	13.00	(330)	60.00	(1524)
CP-RTS-A36A-T	34.75	(883)	38.75	(984)	60.75	(1543)	2.00	(51)	13.00	(330)	66.00	(1676)
CP-RTS-A42A-T	40.50	(1029)	44.50	(1130)	66.50	(1689)	2.00	(51)	13.00	(330)	72.00	(1829)
CP-RTS-A48A-T	46.25	(1175)	50.25	(1276)	72.25	(1835)	2.00	(51)	13.00	(330)	78.00	(1981)
CP-RTS-A54A-T	52.00	(1321)	56.00	(1422)	78.00	(1981)	2.00	(51)	13.00	(330)	84.00	(2134)
CP-RTS-A60A-T	57.75	(1467)	61.75	(1568)	83.75	(2127)	2.00	(51)	13.00	(330)	90.00	(2286)
CP-RTS-A66A-T	63.50	(1613)	67.50	(1715)	89.50	(2273)	2.00	(51)	13.00	(330)	96.00	(2438)
CP-RTS-A72A-T	69.25	(1759)	73.25	(1861)	95.25	(2419)	2.00	(51)	13.00	(330)	102.00	(2591)

## SPECIFICATIONS


Recommended Belt Speeds  
Tungsten: 0 - 1000 fpm (5 m/s)

## MOUNTING INFORMATION

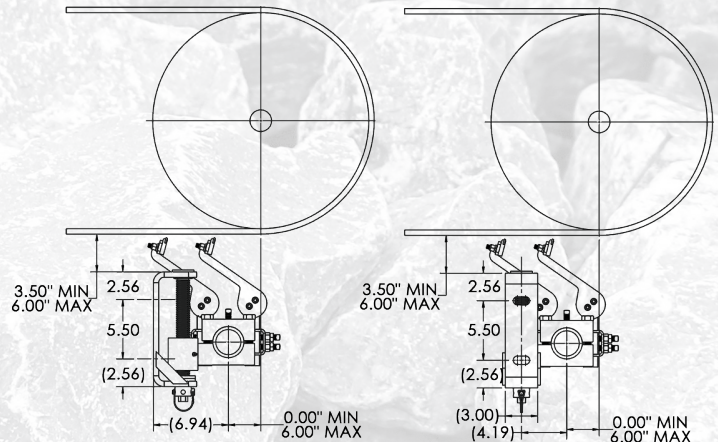

Notes:  
• The RTS can be mounted in two ways, as the drawings show.

## NOMENCLATURE

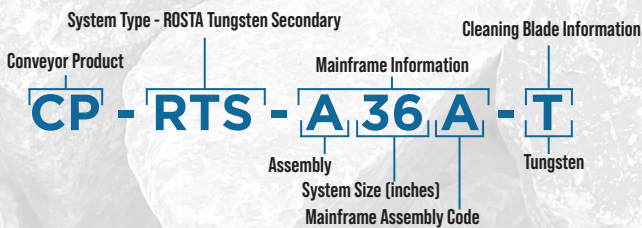

520 9th Street • Gwinn, MI 49841  
906.226.9747 f: 906.226.9779  
[www.argonics.com](http://www.argonics.com)



The Argonics Nested Triangle logo, RTS™, and Safe Torque™ are trademarks of Argonics, Inc.  
Patents: 6,056,112; 7,441,647; 5,979,638 LIB-CP-RTS-04-01 5/26