


Duo Seal™ Skirting



The Duo Seal is the newest skirting offering from Argonics. Its 100% urethane construction fits into most manufacturers' clamping systems, including our Wedge-Loc™ clamp.

The Duo Seal's flexible secondary seal conforms to the belt and keeps dust and material under control. Its compact, smaller footprint requires less belt on the outside of the conveyor in order to install it.

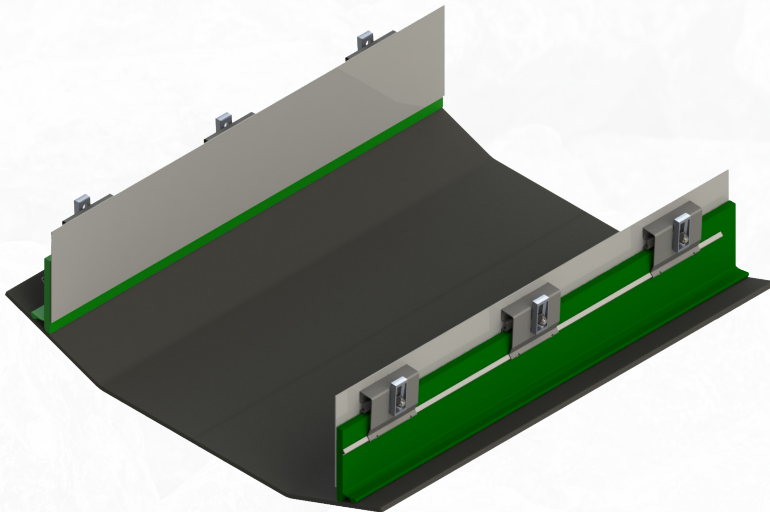


FEATURES AND BENEFITS:

- 100% urethane construction
- Material and dust containment in one solution
- Flexible secondary seal conforms to belt and keeps dust and particulate material under control
- Works with most existing skirt board and clamping systems on the market
- Available in a variety of widths and thicknesses, in lengths up to 50 feet
- Rounded primary seal will work with any trough angle

Duo Seal Material and Dust Containment

The rounded primary seals works with any trough angle.

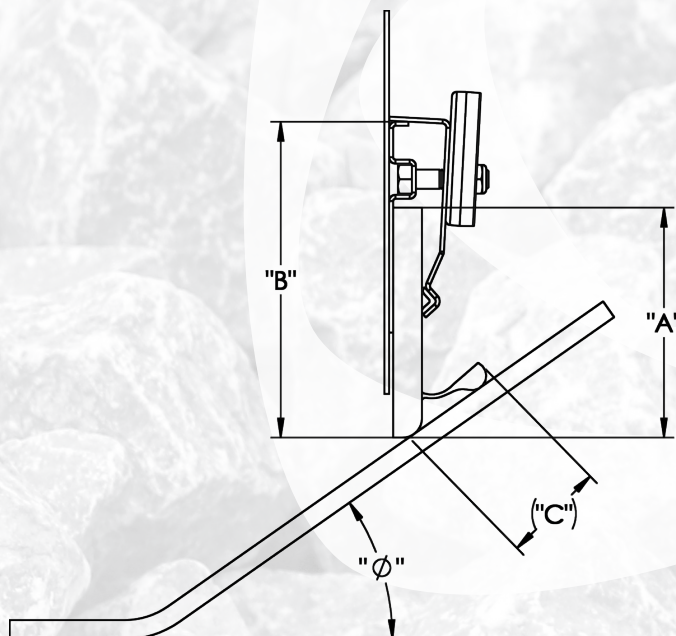

| A | Ø | B | C |
|----|-----|-------|-------|
| 4" | 20° | 6.25" | 2.39" |
| 4" | 35° | 6.25" | 2.68" |
| 4" | 45° | 6.25" | 2.81" |

| A | Ø | B | C |
|----|-----|-------|-------|
| 6" | 20° | 8.25" | 2.33" |
| 6" | 35° | 8.25" | 2.70" |
| 6" | 45° | 8.25" | 2.89" |

| | | | |
|----|-----|-------|-------|
| 5" | 20° | 7.25" | 2.39" |
| 5" | 35° | 7.25" | 2.68" |
| 5" | 45° | 7.25" | 2.81" |

| | | | |
|----|-----|--------|-------|
| 8" | 20° | 10.25" | 2.33" |
| 8" | 35° | 10.25" | 2.70" |
| 8" | 45° | 10.25" | 2.89" |



ARGONICS
ENGINEERED POLYURETHANE

520 9th Street • Gwinn, MI 49841
906.226.9747 800.991.2746 f: 906.226.9779
www.argonics.com



The Argonics Nested Triangle logo and Kryptane® are trademarks or registered trademarks of Argonics, Inc.

Patents: 6,056,112 · 7,441,647 · 5,979,638 LIB-CP-SKS-07-01 2/20